


Ku band Full Dimensional Electronic Steering Phased array Terminal Datasheet



Starwin Ku-band Full Dimension ESA Terminal Description

Starwin Ku-band Full Dimension ESA Terminal is designed with high performance multi-function chipset, addressing the need of high-speed tracking, high integration, high reliability, lower profile, delivering fully smart and economical VSAT terminal solution.

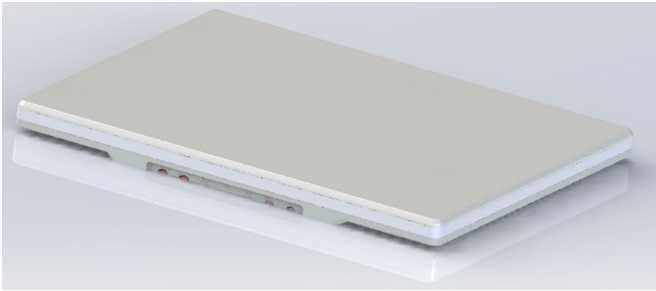

Starwin Ku-band Full Dimension ESA Terminal integrates the electronic steering phased array antenna, control unit, up&down converter and satellite router into one unit under one radome and the wireless access function is also included, which makes the terminal easy to deploy. The electronic steering beam enables high speed satellite tracking. No moving mechanical parts design ensures the high reliability of the terminal. These special features enable Ku-Band ESA terminal to deliver the innovative universal broadband solutions for COTM (Communication On The Move) and COTP (Communication On The Pause), making satellite communication simple & easy.

Features

- * High speed tracking: Fully electronic steering satellite beam
- * High integration: All in one, phased array, ACU, satellite Modem, Up&Down Converter are all integrated in one outdoor unit
- * High reliability: Solid State circuit, no moving mechanical parts inside
- * Simple Setting up: No need satellite technician for installation, cabling, connection and commission etc.
- * Easy Operation: Access satellite broadband in wireless way by smartphone or laptop.
- * Scalable Option: Can be scalable per request
- * Wide application: Work for mobile broadband connectivity under GEO, MEO and LEO.
 - Land (Fixed Platform-COTP)
 - Mobile (Vehicle&Train -COTM)
 - Maritime (Shipping Vessels-COTM)
 - Aero (Airplane and UAV-COTM)
- * Cost Effectiveness: Fully R&D and production by Starwin come down production cost

Ku Band Electronic Steering Phased Array Terminal Specifications

Overall Specifications	
Model No.	ESA49125MUF
Antenna Type	Electronic Steering Phased Array
RF Performance	
Frequency Range	TX 13.75~14.50 GHz, RX 10.70~12.75 GHz
EIRP	≥ 49 dBW @ Normal (Normal direction = Elevation 90°) ≥ 48 dBW @ 30° (30° off axial angle = Elevation angle 60°) ≥ 44.5 dBW @ 60° (60° off axial angle = Elevation angle 30°)
G/T	≥ 12.5 dB/K @ Normal (Normal direction = Elevation 90°) ≥ 11.5 dB/K @ 30° (30° off axial angle = Elevation angle 60°) ≥ 8 dB/K @ 60° (60° off axial angle = Elevation angle 30°)
Applicable Satellite Type	for GEO (HTS), MEO and LEO (Optional)
Polarization	Full polarization, automatic switching
Axis Ratio	≤ 3 dB (Electronically Controlled)
X-Pol Isolation	> 30 dB @ Normal
Coverage	0-360° @ azimuth, off axis angle 0° to 60°
Integrated Tracking System	
Tracking Accuracy	$< 0.2^\circ$
Integrated Tracking Type	< DVB-S, DVB-S2, DVB-S2X
Beam Switching Time	≤ 3 ms (any position)
Dynamic Capture Time of First Boot	≤ 2.5 min
Static Capture Time of First Boot	≤ 2 min
Recapture Time After Loss	< 15 sec (Duration of occlusion ≤ 5 min) < 25 sec (Duration of occlusion > 5 min)
Scan Mode	Electronic Steering + 2D
Integrated Ku Up-Down Converter	
IF Frequency	RX: 950 ~ 2150 MHz, TX: 950 ~ 1700 MHz
IF Input Power (Modem Output)	-35 ~ 0 dBm
LO.	Rx: 9.75/10.6 GHz, Tx: 12.8 GHz
Phase Noise	≤ -60 dBc/Hz (@100Hz), ≤ -70 dBc/Hz (@1kHz) ≤ -80 dBc/Hz (@10kHz), ≤ -90 dBc/Hz (@100kHz) ≤ -120 dBc/Hz (@1MHz)
Modem	
Internal / External Modem	Customizable
Mechanical	
Dimensions	$\leq 1000 \times 650 \times 80$ mm
Weight	≤ 22 kg
Environmental	
Operating Temperature	$-25^\circ\text{C} \sim +55^\circ\text{C}$ (Standard), $-40^\circ\text{C} \sim +70^\circ\text{C}$ (Customizable)
Storage Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$
Humidity	5 ~ 95%
Wind Speed	150 km/h
Ingress Protection	IP66
Power	
DC Power Supply	(With Adapter) AC 90 ~ 264V/50~60Hz (Without Adapter) 28VDC $\pm 5\%$
Power Consumption	≤ 750 W
Interfaces	
IF TX/IF RX	SMA

Network Interface	Waterproof Quick Plug
Power Interface	Waterproof Quick Plug